

# Panasonic

## CV-CFW101L CV-CFW101LN

### Smart look Day/ Night Vari-Focal Dome Camera with IR illuminator



#### Specifications

Parameter	CV-CFW101L	CV-CFW101LN
<b>Camera</b>		
Image Sensor	1/2.9" 1.0 Mega Pixels CMOS	
Effective Pixels	1280 (H) x 720 (V)	
Min Illumination	0.05Lux/ F1.4, 0Lux IR on	
Electronic Shutter	1/50s~1/100,000s	1/60s~1/100,000s
Video Frame Rate	25fps	30fps
Synchronization	Internal	
Day & Night	Auto (ICR)/ Color/ B/W	
Max IR Distance	30m	
Digital Noise Reduction	2D	
White Balance	Auto	
AGC	Auto	
BLC	Auto	
<b>Lens</b>		
Focal Length	2.7-12 mm @ Manual/ Fixed Iris	
Angular Field of View	H: 35°(Tele) ~ 93°(Wide) V: 21°(Tele) ~ 50°(Wide)	
Lens Type	Φ14	
<b>Input / Output</b>		
Video Output	1 CH BNC HD-CVI video output	
<b>General</b>		
Power	DC 12V±25%	
Power Consumption	2.8W MAX	
Working Temperature	-30°C~+60°C. Less than 95% RH (no condensation)	
Dimensions	Φ119 mm x 97.4 mm	
Weight (approx.)	550g	
Installation Mode	Wall mount/ In-ceiling mount	
External Case	Metal	


#### Key Features

- High-performance CMOS image sensor.
- Support 720p@25fps (PAL)/ 30fps (NTSC).
- Support 75-3 coaxial cable (Belden 9259 or equivalent) transmission up to 800m.
- High speed & long distance real-time transmission.
- Support ICR for day time and night time operation.
- Support auto exposure, auto white balance, auto electronic shutter and auto gain function.
- High image color rendition, vivid image.
- Support manual adjustment of lens zoom and focus.
- Support DC12V power supply.
- IP66 compliance.

#### Standard Accessories

- Quick guide.....1 pc
- Important safety instruction.....1 pc

#### Appearance

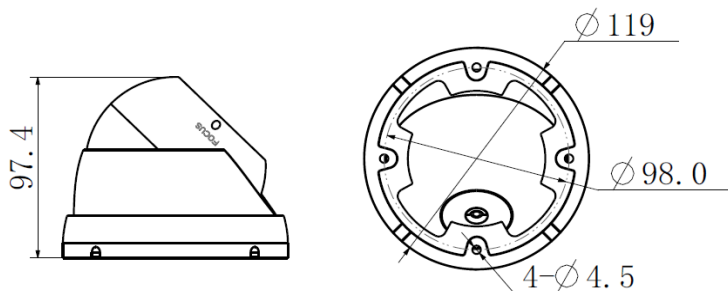

#### Important

- Safety Precaution: Carefully read the operating instruction manual before using this product.

- All pictures are simulated.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.

**DISTRIBUTED BY:**