



CV-CFW201AL

Smart look Day/Night Vari-Focal Dome Camera with IR illuminator





Key Features

- High-performance CMOS image sensor.
- Supports 1080p@25fps (PAL)/30fps (NTSC).
- Supports transmission up to 800m (1080P)/1200m (720P).
- High speed & long distance real-time transmission.
- Supports ICR for day time and night time operation.
- Supports auto exposure, auto white balance, auto electronic shutter and auto gain function.
- Supports DC12V power supply.
- IP66 compliance.

Standard Accessories

- Quick Guide.....1 pc
- Important Safety Instruction.....1 pc
- Hex Wrench.....1 pc

Appearance (mm [inch])

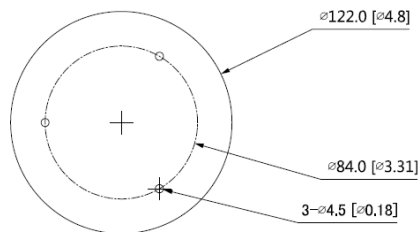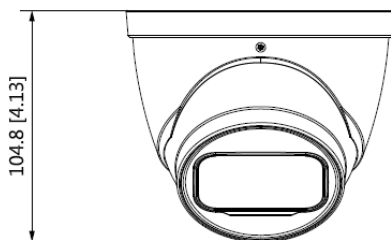

Specifications

Parameter	CV-CFW201AL
Camera	
Image Sensor	1/2.7 inch CMOS
Effective Pixels	1920(H) x 1080(V), 2MP
Min. Illumination	0.02Lux/F1.7, 30IRE, 0Lux IR on
Electronic Shutter	PAL : 1/25s - 1/100,000s NTSC : 1/30s - 1/100,000s
Video Frame Rate*	PAL : 25fps NTSC : 30fps
Day/Night	Auto/Color/ B/W
Max. IR Distance	60m
Smart IR	Yes
Digital Noise Reduction	2D
White Balance	Auto, manual
Gain Control	Auto, manual
BLC	BLC/HLC/DWDR
Lens	
Focal Length	2.7mm - 12mm
Field of View	D: 38° - 125° H: 33° - 102° V: 19° - 53°
Lens Type	Motorized vari-focal
Input/Output	
Video Output	1CH BNC HD-CVI video output
General	
Power	DC 12V±30%
Power Consumption	Max. 8.2W (DC 12V, IR on)
Working Temperature	-30°C - +60°C Less than 95% RH (non-condensation)
Dimensions	Φ122mm x 104.8 mm
Weight (approx.)	570g
External Case	Metal throughout the whole casing

*Refer to DVR spec sheet for recording frame rate limitation

Important

- Safety Precaution: Carefully read the operating instruction manual before using this product.

- All pictures are simulated.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.

DISTRIBUTED BY: