

4 CH/8 CH HD Analog Digital Video Recorder




Key Features

- 4 CH (CJ-HDR104B)/8 CH (CJ-HDR108B) with 720P/1080P recording playback and live view
- H.264 and H.265 video compression
- HDMI/VGA simultaneous video output
- Support 1 SATA HDD up to 6TB capacity for CJ-HDR104B and 10TB capacity for CJ-HDR108B, 2 USBs
- Digital zoom during live & playback
- Support iPhone, iPad, Android mobile devices
- Video Motion Detection (VMD)
- Daily Health Report

Standard Accessories

- Quick Start Guide.....1 pc
- Important Safety Instructions.....1 pc

Appearance

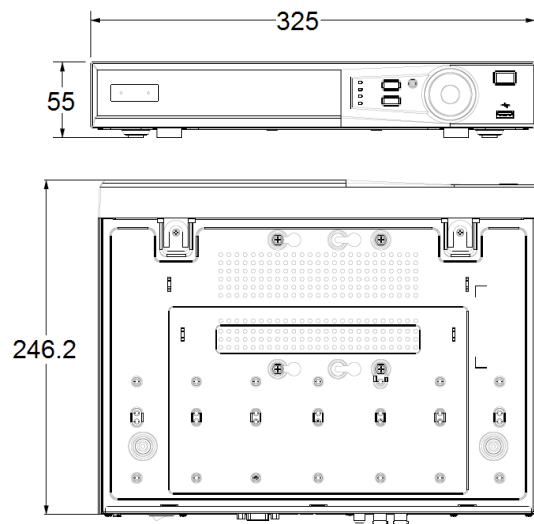

Specifications

Model	CJ-HDR104B	CJ-HDR108B
Video/Audio IF		
Video Input	4 CH, BNC	8 CH, BNC
Type	HDCVI	720P/1080P
	Analog	PAL/NTSC
Video Output	1 HDMI, 1 VGA	
Audio Input/Output	1/1 CH, RCA	
Two-way Talk	Reuse audio input/output CH 1	
Display		
Output Resolution	1920x1080, 1280x1024, 1280x720	
Multiscreen Mode	1/4	1/4/8/9
Privacy Masking	4 rectangular zones (each camera)	
OSD	Camera Title, Time, Video Loss, Camera Lock, Motion Detection (MD), Recording	
Video/Audio Format		
Video/Audio Compression	Video: H.264, H.265 Audio: AAC (only for the 1st channel), G.711A, G.711U, PCM	
Record Rate*	Main Stream	1st channel 5M-N (1~20fps), other channels 5M-N (1~10fps); 4M-N/1080P (1~15fps)
	Sub Stream	1st & 5th channels 5M-N (1~20fps), other channels 5M-N (1~10fps); 4M-N/1080P (1~15fps)
Bit Rate	1080N/720P/960H/D1/CIF (1~25/30fps)	
Record Mode	32Kbps~6144Kbps per channel	
Record Interval	Manual, Schedule (General, Continuous), MD, Alarm, Stop	
	1~60 min (default: 60 min), Pre-record: 0~30 sec, Post-record: 10~300 sec	
Alarm/Event		
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips	
Video Detection	MD, MD Zones: 396 (22x18), Video Loss and Tampering	
Playback & Backup		
Playback	1/4	1/4/9
Search Mode	Time/Date, Alarm, MD and Exact Search (accurate to second)	
Playback Functions	Play, Pause, Stop, Rewind, Fast Play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Backup Selection, Digital Zoom, Customized Playback, Splice Playback	
Backup Mode	USB Device/Network	
Network		
Network Interface	RJ-45 port (100M)	
Network Functions	HTTP, HTTPS, TCP/IP, IPv4/IPv6, SNMP, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, DDNS, FTP, EZ Remote	
Max. User Access	128 users	
Mobile Device	iPhone, iPad, Android	
HDD		
Type	1 SATA port, up to 6TB	1 SATA port, up to 10TB
External Interface		
USB	2 ports (1 rear), USB2.0	
RS485	1 port, for PTZ Control	
General Specifications		
Power Supply	DC12V/1.5A	DC12V/2A
Power Consumption	<10W (without HDD)	
Working Environment	-10°C ~ +45°C, 10%~90% RH	-10°C ~ +55°C, 10%~90% RH
Dimension (WxDxH)	Mini 1U, 325mm x 255mm x 55mm	
Weight	1.0kg (without HDD)	1.2kg (without HDD)

- For channel 1 and channel 5 (CJ-HDR108B only), the change of the frame rate to 16fps or more at 1080P and above, will update the frame rate settings of other channels to 7fps.
- Recommended to schedule a weekly reboot.

Important

- Safety Precaution: Carefully read the user's manual before using this product.

- All pictures are simulated.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.

DISTRIBUTED BY: